

## 15 DOUBLE GIRDER HOIST NC, REEVING: 04

### Hoisting speed (m/min)

Load		Class	E gear + P3/T3 motor		F gear + P3/T3 motor		H gear + P4/T4 motor	
kg	Fem/ISO		High	Low	High	Low	High	Low
4000	3m/M6	4	0,7	5	0,8	8	1,3	
5000	2m/M5	4	0,7	5	0,8	8	1,3	
6300	1Am/M4	4	0,7	-	-	-	-	

### Hoist dimensions

HOL m	Length code	M1 mm	M2 mm	H1 mm	H2 mm	Min R mm	Weight kg
6	B	467	252	537	49	1200	315
9	C	567	252	537	74	1200	325
12	D	667	352	637	99	1400	340
15	E	787	352	637	129	1400	360

### Motor dimensions

Motor	P3	P4	T3	T4
M3 (mm)	597	690	507	610
Weight ( kg)	35	53	22	45

### Trolley dimensions

C1	C2	D1 (Ø)	D2 (Ø)	D3 (Ø)	WB	WW					
350	447	90	120	63	900	65					
L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
83	324	250	1176	427	301	90	450	450	588	588	138
L13	L14	L15	L16	L17							
103	600	212	138	12							


D002095\_A  
062139

Note: Weight calculated with P3 motor.

Note: All dimensions in mm.

Note: Min R with service platform and second brake.

Note Standard rail gauges: 1200, 1400, 1700 and 2000.

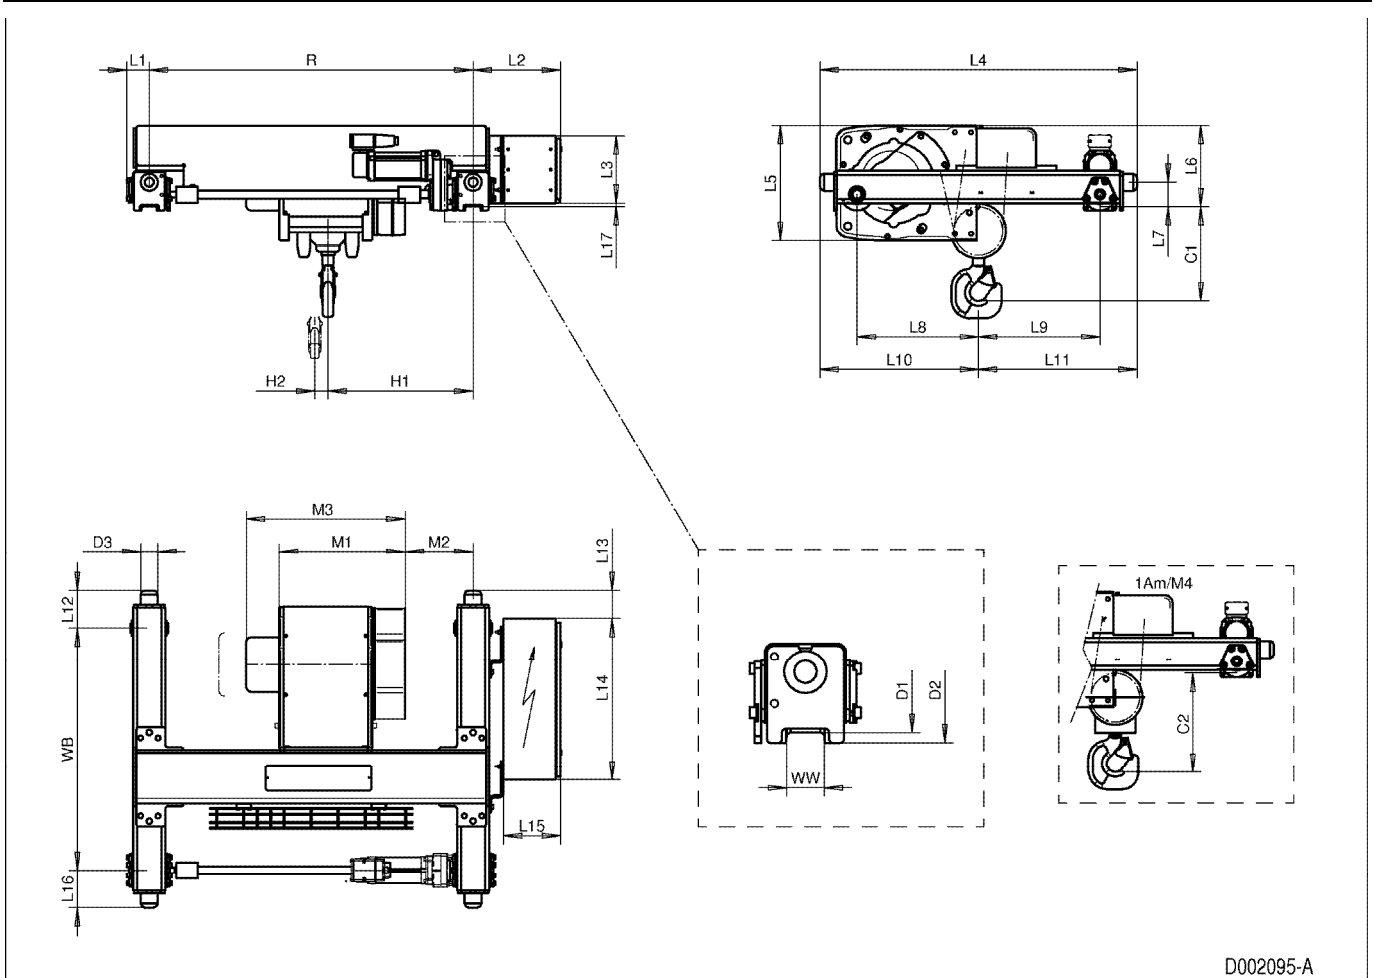

D002095-A