

32 DOUBLE GIRDER HOIST NE, REEVING: 2 X 06

Hoisting speed (m/min)

Load kg	Class Fem/ISO	E gear		F gear		G gear		H gear		J gear	
		High	Low	High	Low	High	Low	High	Low	High	Low
		2,5	0,4	3,2	0,5	4	0,7	5	-	6,3	-
20000	3m/M6	P6/T6 motor		P6/T6 motor		P7/T7 motor		T8 motor		T9 motor	
25000	2m/M5	P6/T6 motor		P6/T6 motor		P7/T7 motor		T8 motor		T9 motor	
30000	1Am/M4	P6/T6 motor		P7/T7 motor		P8/T8 motor		T9 motor		TA motor	

Hoist dimensions

HOL m	Length code	M1 mm	M3 mm	Min R mm	Max R mm	Weight kg
5,5	E	682	359	1400	2400	2060
7,5	F	832	434	1700	2400	2170
10	G	1022	489	2000	2700	2230
13	H	1272	364	2000	3100	2390
17,5	J	1622	389	2400	3400	2590
21,5	K	1922	389	2700	4200	2820
26	L	2272	414	3100	4200	3050
29	M	2522	439	3400	4200	3230
33	N	2822	489	3800	4200	3490

Motor dimensions

Motor	P6	P7	P8	T6	T7	T8	T9	TA
M2 (mm)	536	576	711	536	536	536	536	576
Weight (kg)	85	105	106	65	71	81	92	106

Trolley dimensions

C	D1 (Ø)	D2 (Ø)	D3 (Ø)	WB	WW min	WW max					
1179	200	230	80	1400	55	100					
L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12
428,7	400	187	514	123	27	1826	702	605	88	686	714
L13	L14	L15	L16	L17	L18	L19	L20	L21			
926	927	44	218	213	900	186	255	213			

D002158_A
005050


Note: Weight calculated with P6 motor.

Note: All dimensions in mm.

Note: Min R with service platform.

Note: Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200.

Note: M3 and weight calculated with the Min R.

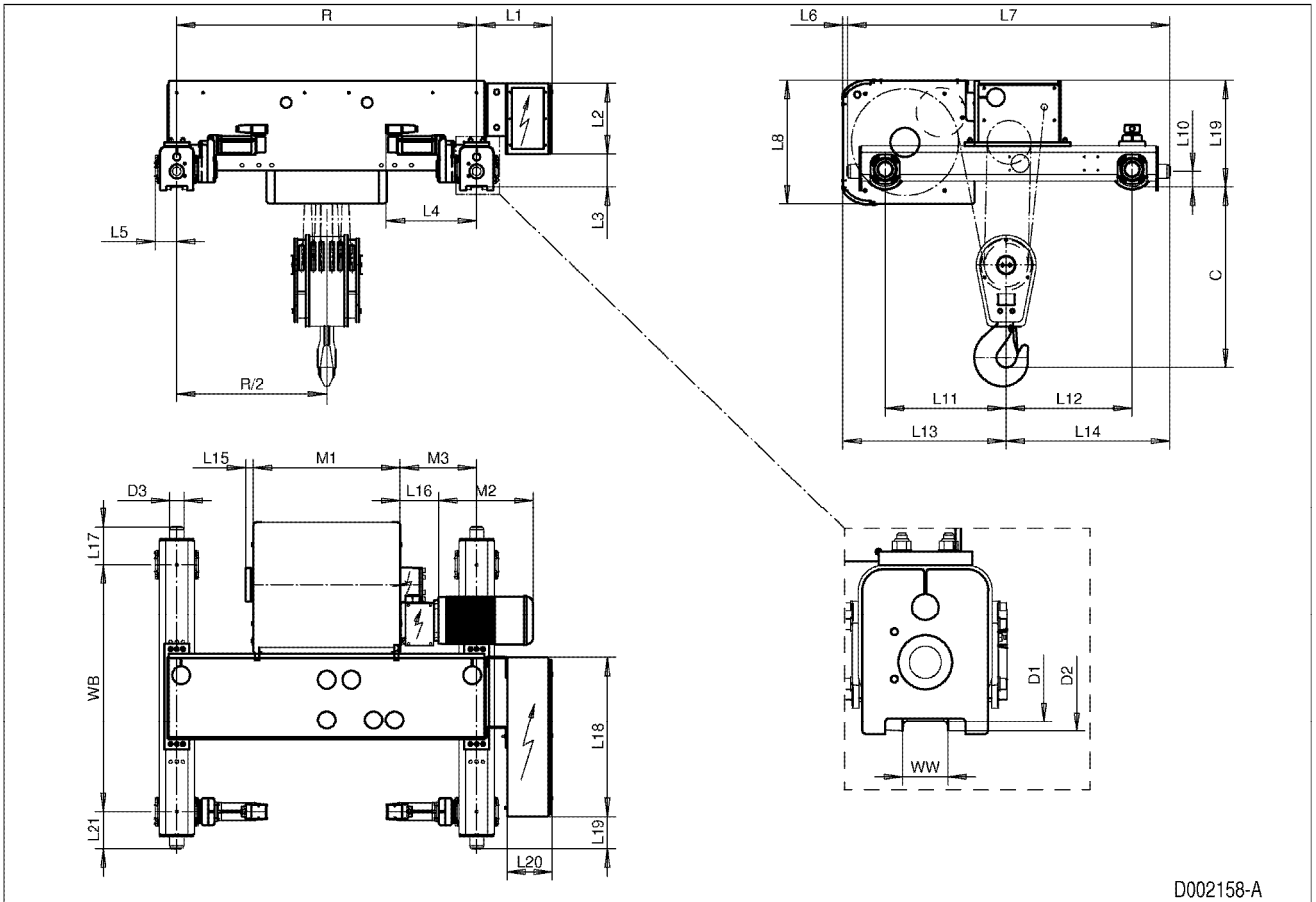

D002158-A